

## Introduction

The Phase Locked Loop primitive in Virtex®-5 FXT FPGA parts is used to generate multiple clocks with defined phase and frequency relationships to a given input clock. The Phase Locked Loop (PLL) module is a wrapper around the PLL\_ADV primitive that allows the PLL to be used in the EDK tool suite.

## Features

- Wrapper around the PLL\_ADV primitive
- Full support for use with EDK 9.1 and later versions
- Configurable BUFG insertion
- Configurable output delay adjustment for PPC block clock insertion delay compensation
- Six output clocks with independently selectable frequencies

LogiCORE™ IP Facts		
<b>Core Specifics</b>		
<a href="#">See EDK Supported Device Families.</a>		
Version of core	pll_module	v1.00a
<b>Resources Used</b>		
	Min	Max
LUTs	N/A	N/A
FFs	N/A	N/A
Block RAMs	N/A	N/A
Special Features	1 PLL Block	
<b>Provided with Core</b>		
Documentation	Product Specification	
Design File Formats	VHDL	
Constraints File	N/A	
Verification	N/A	
Instantiation Template	N/A	
Reference Designs & application notes	None	
Additional Items	None	
<b>Design Tool Requirements</b>		
Xilinx® Implementation Tools	<a href="#">See Tools for requirements.</a>	
Verification		
Simulation		
Synthesis		
<b>Support</b>		
Provided by Xilinx, Inc.		

## Functional Description

The PLL Module takes an input clock named CLKIN1 and generates several output clocks, each of which can be configured to have a different frequency that is dependent on the input clock frequency. The PLL Module encapsulates the PLL\_ADV primitive as shown in [Figure 1](#). The PLL\_ADV primitive is described in the *Virtex-5 FPGA Libraries Guide* that is provided as part of the ISE® tools documentation. Detailed information about the usage of the PLL\_ADV primitive is available in the *Virtex-5 FPGA User Guide*.

The PLL Module provides optional buffers for the CLKIN1 input, and the CLKOUT\*, and CLKFBOUT outputs. CLKOUT\* represents the six clock outputs CLKOUT0, CLKOUT1, CLKOUT2, CLKOUT3, CLKOUT4, and CLKOUT5. The second clock input of the PLL\_ADV primitive is not used, and the clock input select input of the PLL\_ADV primitive is connected to a constant to always select the CLKIN1 signal. The dynamic reconfiguration inputs and outputs of the PLL\_ADV primitive are hidden/terminated within the PLL module, as is the control input for the PMCD mode. All other inputs and outputs of the PLL\_ADV primitive are inputs and outputs of the PLL module.

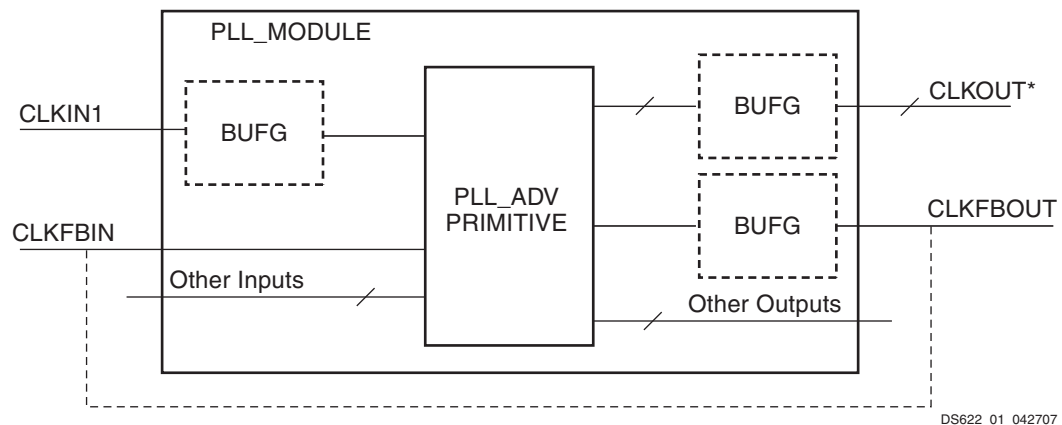


Figure 1: LL Module Implementation and Usage

In the context of an embedded processor system, the recommended usage of the PLL module is to take a single reference clock input and configure the CLKOUT\* signals to produce the different clock frequencies and phases required, with the CLKOUT\* and CLKFBOUT signals buffered and connected as shown by the dotted lines.

The output clock frequencies are derived from the input clock frequency and the values of the following parameters: C\_DIVCLK\_DIVIDE, C\_CLKFBOUT\_MULT, C\_CLKOUTn\_DIVIDE.

$$\text{Frequency of CLKOUTn} = \text{Frequency of CLKIN1} * (\text{C\_CLKFBOUT\_MULT} / \text{C\_DIVCLK\_DIVIDE}) / \text{C\_CLKOUTn\_DIVIDE}$$

## PLL Module Parameters

The PLL module is configured by selecting appropriate values for its MPD (Microprocessor Peripheral Definition) parameters, described in [Table 1](#).

**Table 1: MPD Parameters for PLL Module**

Parameter Name	Description	Allowed Values	Default Value	Type
C_BANDWIDTH	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	OPTIMIZED	string
C_CLKFBOUT_BUF	If C_CLKFBOUT_BUF = true, a BUFG is inserted between the CLKFBOUT pin of the PLL_ADV primitive and CLKFBOUT output.	true,false	false	Boolean
C_CLKFBOUT_DESKEW_ADJUST	Clock delay attribute for CLKOUT5 output	NONE,PPC	NONE	string
C_CLKFBOUT_MULT	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_CLKFBOUT_PHASE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real
C_CLKIN1_BUF	If C_CLKIN1_BUF = true, a BUFG is inserted between the CLKIN1 input and the CLKIN1 pin of the PLL_ADV primitive.	true,false	false	Boolean
C_CLKIN1_PERIOD	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real
C_CLKOUT0_BUF	If C_CLKOUT0_BUF = true, a BUFG is inserted between the CLKOUT0 pin of the PLL_ADV primitive and CLKOUT0 output.	true,false	false	Boolean
C_CLKOUT0_DESKEW_ADJUST	Clock delay attribute for CLKOUT0 output	NONE, PPC	NONE	string
C_CLKOUT0_DIVIDE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_CLKOUT0_DUTY_CYCLE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.5	real
C_CLKOUT0_PHASE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real
C_CLKOUT1_BUF	If C_CLKOUT1_BUF = true, a BUFG is inserted between the CLKOUT1 pin of the PLL_ADV primitive and CLKOUT1 output.	true,false	false	Boolean
C_CLKOUT1_DESKEW_ADJUST	Clock delay attribute for CLKOUT1 output	NONE, PPC	NONE	string
C_CLKOUT1_DIVIDE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_CLKOUT1_DUTY_CYCLE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.5	real
C_CLKOUT1_PHASE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real

Table 1: MPD Parameters for PLL Module (Contd)

Parameter Name	Description	Allowed Values	Default Value	Type
C_CLKOUT2_BUF	If C_CLKOUT2_BUF = true, a BUFG is inserted between the CLKOUT2 pin of the PLL_ADV primitive and CLKOUT2 output.	true,false	false	Boolean
C_CLKOUT2_DESKEW_ADJUST	Clock delay attribute for CLKOUT2 output	NONE, PPC	PPC	string
C_CLKOUT2_DIVIDE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_CLKOUT2_DUTY_CYCLE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.5	real
C_CLKOUT2_PHASE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real
C_CLKOUT3_BUF	If C_CLKOUT3_BUF = true, a BUFG is inserted between the CLKOUT3 pin of the PLL_ADV primitive and CLKOUT3 output.	true,false	false	Boolean
C_CLKOUT3_DESKEW_ADJUST	Clock delay attribute for CLKOUT3 output	NONE, PPC	PPC	string
C_CLKOUT3_DIVIDE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_CLKOUT3_DUTY_CYCLE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.5	real
C_CLKOUT3_PHASE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real
C_CLKOUT4_BUF	If C_CLKOUT4_BUF = true, a BUFG is inserted between the CLKOUT4 pin of the PLL_ADV primitive and CLKOUT4 output.	true,false	false	Boolean
C_CLKOUT4_DESKEW_ADJUST	Clock delay attribute for CLKOUT4 output	NONE, PPC	PPC	string
C_CLKOUT4_DIVIDE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_CLKOUT4_DUTY_CYCLE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.5	real
C_CLKOUT4_PHASE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real
C_CLKOUT5_BUF	If C_CLKOUT5_BUF = true, a BUFG is inserted between the CLKOUT5 pin of the PLL_ADV primitive and CLKOUT5 output.	true,false	false	Boolean
C_CLKOUT5_DESKEW_ADJUST	Clock delay attribute for CLKOUT5 output	NONE, PPC	PPC	string
C_CLKOUT5_DIVIDE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_CLKOUT5_DUTY_CYCLE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.5	real

Table 1: MPD Parameters for PLL Module (Contd)

Parameter Name	Description	Allowed Values	Default Value	Type
C_CLKOUT5_PHASE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.0	real
C_COMPENSATION	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	SYSTEM_SYNCHRONOUS	string
C_DIVCLK_DIVIDE	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	1	integer
C_EXT_RESET_HIGH	IF C_EXT_RESET_HIGH = 0, the RST signal is inverted before connecting to the PLL_ADV.	0,1	1	integer
C_FAMILY	Target FPGA family	virtex5, virtex5fx	virtex5	string
C_REF_JITTER	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	0.1	real
C_RESET_ON_LOSS_OF_LOCK	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	false	Boolean
C_RST_DEASSERT_CLK	This parameter passes the value to the equivalent attribute of the PLL_ADV.	Same as PLL_ADV	CLKIN1	string

## Allowable Parameter Combinations

The C\_CLKOUTn\_DESKEW\_ADJUST parameter must be set to NONE for clock outputs connected to the CPMC440CLK and CPMINTERCONNECTCLK pins on the ppc440 primitive in the Virtex-5 FXT FPGA. Clock output signals connected to any other pins on the ppc440 primitive must have the C\_CLKOUTn\_DESKEW\_ADJUST parameter set to PPC. Clock output signals connected to soft logic modules that connect to the ppc440 primitive must have the C\_CLKOUTn\_DESKEW\_ADJUST parameter set to PPC. The C\_CLKFBOUT\_BUF parameter must be set to true in the recommended configuration shown in [Figure 1](#). The C\_CLKOUTn\_BUF parameters must be set to true for any clock output that is used. The PLL\_ADV primitive has additional restrictions on parameter combinations that are allowed, and these restrictions are documented in the *Virtex-5 FPGA User Guide* and *Virtex-5 FPGA Libraries Guide*.

**Note:** The PLL Module wrapper does not perform any error checking to enforce the design rules and restrictions described in the *Virtex-5 FPGA User Guide*.

## PLL Module I/O Signals

The input and output signals of the PLL module are described in [Table 2](#).

Table 2: PLL Module Input and Output Signals

Signal	Signal Direction	Default Value	Description
CLKFBDCM	Output	Same as PLL_ADV primitive	Feedback clock signal to use when the PLL drives a DCM or is driven by a DCM
CLKFBOUT	Output		Feedback clock output to be connected to CLKFBIN
CLKOUT0	Output		Clock output 0
CLKOUT1	Output		Clock output 1
CLKOUT2	Output		Clock output 2
CLKOUT3	Output		Clock output 3
CLKOUT4	Output		Clock output 4
CLKOUT5	Output		Clock output 5
CLKOUTDCM0	Output		Local copy of CLKOUT0 that connects to the DCM within the same tile
CLKOUTDCM1	Output		Local copy of CLKOUT1 that connects to the DCM within the same tile
CLKOUTDCM2	Output		Local copy of CLKOUT2 that connects to the DCM within the same tile
CLKOUTDCM3	Output		Local copy of CLKOUT3 that connects to the DCM within the same tile
CLKOUTDCM4	Output		Local copy of CLKOUT4 that connects to the DCM within the same tile
CLKOUTDCM5	Output		Local copy of CLKOUT5 that connects to the DCM within the same tile
LOCKED	Output		Synchronous output that goes high when the PLL has achieved phase alignment and frequency matching
CLKFBIN	Input		Clock feedback input
CLKIN1	Input		Primary clock input
RST	Input		Asynchronous reset signal

## Register Descriptions

Not Applicable.

## Timing Diagrams

See the *Virtex-5 FPGA User Guide* for more information.

## Design Constraints

None.

## Design Implementation

### Target Technology

The target technology is an FPGA listed in [EDK Supported Device Families](#).

### Device Utilization and Performance Benchmarks

This module uses one PLL primitive and one BUFG primitive for each clock output that is used.

### Specification Exceptions

Not Applicable

### Reference Documents

*UG190 Virtex-5 FPGA User Guide*

Virtex-5 FPGA Libraries Guide for HDL Designs

### Revision History

Date	Version	Revision
4/27/2007	1.0	Initial Xilinx release.
4/10/2008	1.1	The PLL Module wrapper does not perform any error checking to enforce the design rules and restrictions described in the <i>Virtex-5 FPGA User Guide</i> .
4/24/2009	1.2	Replaced references to supported device families and tool name(s) with hyperlinks to PDF files; Updated trademark information.

### Notice of Disclaimer

Xilinx is providing this product documentation, hereinafter "Information," to you "AS IS" with no warranty of any kind, express or implied. Xilinx makes no representation that the Information, or any particular implementation thereof, is free from any claims of infringement. You are responsible for obtaining any rights you may require for any implementation based on the Information. All specifications are subject to change without notice. XILINX EXPRESSLY DISCLAIMS ANY WARRANTY WHATSOEVER WITH RESPECT TO THE ADEQUACY OF THE INFORMATION OR ANY IMPLEMENTATION BASED THEREON, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OR REPRESENTATIONS THAT THIS IMPLEMENTATION IS FREE FROM CLAIMS OF INFRINGEMENT AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Except as stated herein, none of the Information may be copied, reproduced, distributed, republished, downloaded, displayed, posted, or transmitted in any form or by any means including, but not limited to, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Xilinx.