

Introduction

This document describes the specifications for a XPS Timer/Counter core for the Processor Local Bus.

The XPS Timer/Counter is a 32-bit timer module that attaches to the PLB bus.

Features

- Connects as a 32-bit slave on PLB V4.6 buses of 32, 64 or 128 bits
- PLB interface with byte-enable support
- Two programmable interval timers with interrupt, event generation, and event capture capabilities
- Configurable counter width
- One Pulse Width Modulation (PWM) output
- Freeze input for halting counters during software debug

| LogiCORE™ Facts | | |
|---------------------------------------|--|--------|
| Core Specifics | | |
| Supported Device Family | Spartan™-3E, Spartan-3, Spartan-3A, Spartan-3AN, Virtex-4™, Virtex-5 | |
| Version of Core | xps_timer | v1.00a |
| Resources Used | | |
| | Min | Max |
| Slices | Refer to the Table 9 , Table 10 and Table 11 | |
| LUTs | | |
| FFs | | |
| Block RAMs | | |
| Special Features | None | |
| Provided with Core | | |
| Documentation | Product Specification | |
| Design File Formats | VHDL | |
| Constraints File | N/A | |
| Verification | N/A | |
| Instantiation Template | N/A | |
| Reference Designs & application notes | N/A | |
| Additional Items | N/A | |
| Design Tool Requirements | | |
| Xilinx Implementation Tools | 9.1i or later | |
| Verification | ModelSim SE /EE6.0c or later | |
| Simulation | ModelSim SE /EE6.0c or later | |
| Synthesis | XST 9.1i or later | |
| Support | | |
| Support provided by Xilinx, Inc. | | |

© 2006 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and further disclaimers are as listed at <http://www.xilinx.com/legal.htm>. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.
 NOTICE OF DISCLAIMER: Xilinx is providing this design, code, or information "as is." By providing the design, code, or information as one possible implementation of this feature, application, or standard, Xilinx makes no representation that this implementation is free from any claims of infringement. You are responsible for obtaining any rights you may require for your implementation. Xilinx expressly disclaims any warranty whatsoever with respect to the adequacy of the implementation, including but not limited to any warranties or representations that this implementation is free from claims of infringement and any implied warranties of merchantability or fitness for a particular purpose.

Functional Description

The Timer/Counter is organized as two identical timer modules as shown in [Figure 2](#). Each timer module has an associated load register that is used to hold either the initial value for the counter for event generation, or a capture value, depending on the mode of the timer.

The *generate value* is used to generate a single interrupt at the expiration of an interval, or a continuous series of interrupts with a programmable interval. The *capture value* is the timer value that has been latched on detection of an external event. The clock rate of the timer modules is SPLB_Clk (no prescaling of the clock is performed). All of the Timer/Counter interrupts are OR'ed together to generate a single external interrupt signal. The interrupt service routine reads the control/status registers to determine the source of the interrupt.

Programming Model

Timer Modes

There are three modes that can be used with the two Timer/Counter modules:

- Generate mode
- Capture mode
- Pulse Width Modulation (PWM) mode.

The modes and their characteristics are described in the following sections.

Generate Mode

In the Generate mode, the value in the load register is loaded into the counter. The counter, when enabled, begins to count up or down, depending on the selection of the UDT bit in the Timer Control Status Register (TCSR). See [Figure 6](#) and [Figure 7](#). On transition of the carry out of the counter, the counter stops or automatically reloads the generate value from the load register and continues counting as selected by the ARHT bit in the TCSR. The TINT bit is set in TCSR and, if enabled, the external GenerateOut signal is driven to 1 for one clock cycle. If enabled, the interrupt signal for the timer is driven to 1 for one clock cycle. This mode is useful for generating repetitive interrupts or external signals with a specified interval.

Characteristics

The generate mode has the following characteristics:

- The value loaded into the load register is called the generate value.
- On startup, the generate value in the load register must be loaded into the counter by setting the Load bit in the Timer Control Status Register (TCSR). This applies whether the counter is set up to Auto Reload or Hold when the interval has expired. Setting the Load bit to '1' loads the counter with the value in the load register. For proper operation, the Load bit must be cleared before the counter is enabled.
- When the ARHT bit (Auto Reload/Hold) is set to '1' and the counter rolls over from all '1's to all '0's when counting up, or conversely from all '0's to all '1's when counting down, the generate value in the load register will be automatically reloaded into the counter and the counter will continue to count. If the GenerateOut signal is enabled (bit GENT in the TCSR), an output pulse will be generated (one clock period in width). This is useful for generating a repetitive pulse train with a specified period.
- When the ARHT bit (Auto Reload/Hold) is set to '0' and the counter rolls over from all '1's to all

'0's, when counting up, or conversely, from all '0's to all '1's, when counting down, the counter will hold at the current value and will not reload the generate value. If the generate out signal is enabled (bit GENT in the TCSR), an output pulse of one clock period in width will be generated. This is useful for a one-shot pulse that is to be generated after a specified period of time.

- The counter can be set up to count either up or down as determined by the selection of the UDT bit in the TCSR. If the counter is set up as a down counter, the generate value is the number of clocks in the timing interval. The period of the GenerateOut signal is the generate value times the clock period.
- When the counter is set to count down,
$$\text{TIMING_INTERVAL} = (\text{TLR}_x + 2) \times \text{PLB_CLOCK_PERIOD}$$
- When the counter is set to count up,
$$\text{TIMING_INTERVAL} = (\text{MAX_COUNT} - \text{TLR}_x + 2) \times \text{PLB_CLOCK_PERIOD},$$
where MAX_COUNT is the maximum count value of the counter, such as 0xFFFFFFFF for a 32-bit counter.
- The GenerateOut signals can be configured as high-true or low-true.

Capture Mode

In Capture Mode, the value of the counter is stored in the load register when the external capture signal is asserted. The TINT bit is also set in the Timer Control Status Register (TCSR) on detection of the capture event. The counter can be configured as an up or down counter for this mode as determined by the selection of the UDT bit in TCSR. The ARHT bit controls whether the capture value is overwritten with a new capture value before the previous TINT flag is cleared. This mode is useful for time tagging external events while simultaneously generating an interrupt.

Characteristics

Capture Mode has the following characteristics:

- The capture signal can be configured to be low-true or high-true.
- The capture signal is sampled within the Timer/Counter with the SPLB_Clk. The capture event is defined as the transition on the sampled signal to the asserted state. For example, if the capture signal is defined to be high-true, then the capture event is when the sampled signal, synchronized to the SPLB_Clk, transitions from '0' to '1'.
- When the capture event occurs, the counter value is written to the load register. This value is called the capture value.
- When the ARHT bit (Auto Reload/Hold) is set to '0' and the capture event occurs, the capture value is written to the Load Register which holds the capture value until the load register is read. If the load register is not read, subsequent capture events will not update the load register, and will be lost.
- When the ARHT bit (Auto Reload/Hold) is set to '1', and the capture event occurs, the capture value is always written to the load register. Subsequent capture events will update the load register and will overwrite the previous value, whether it has been read or not.
- The counter can be set up to count either up or down as determined by the selection of the UDT bit in the Timer Control Status Register (TCSR).

Pulse Width Modulation (PWM) Mode

In PWM mode, two timer/counters are used as a pair to produce an output signal (PWM0) with a specified frequency and duty factor. Timer0 sets the period and Timer1 sets the high time for the PWM0 output.

Characteristics

PWM Mode has the following characteristics:

- The mode for both Timer0 and Timer1 must be set to Generate Mode (bit MDT in the TCSR set to '0').
- The PWMA0 bit in TCSR0 and PWMB0 bit in TCSR1 must be set to '1' to enable PWM mode.
- The GenerateOut signals must be enabled in the TCSR (bit GENT set to '1'). The PWM0 signal is generated from the GenerateOut signals of Timer0 and Timer1, so these signals must be enabled in both timer/counters.
- The assertion level of the GenerateOut signals for both timers in the pair must be set to '1'. This is done by setting C_GEN0_ASSERT and C_GEN1_ASSERT to '1'.
- The counter can be set to count up or down.

Setting the PWM Period and Duty Factor

The PWM period is determined by the generate value in Timer0's load register (TLR0). The PWM high time is determined by the generate value in Timer1's load register (TLR1). The period and duty factor are calculated as follows:

When counters are configured to count up (UDT = '0'):

$$\begin{aligned} \text{PWM_PERIOD} &= (\text{MAX_COUNT} - \text{TLR0} + 2) \times \text{PLB_CLOCK_PERIOD} \\ \text{PWM_HIGH_TIME} &= (\text{MAX_COUNT} - \text{TLR1} + 2) \times \text{PLB_CLOCK_PERIOD} \end{aligned}$$

When counters are configured to count down (UDT = '1'):

$$\begin{aligned} \text{PWM_PERIOD} &= (\text{TLR0} + 2) \times \text{PLB_CLOCK_PERIOD} \\ \text{PWM_HIGH_TIME} &= (\text{TLR1} + 2) \times \text{PLB_CLOCK_PERIOD} \end{aligned}$$

where MAX_COUNT is the maximum count value for the counter, such as 0xFFFFFFFF for a 32-bit counter.

Interrupts

The TC interrupt signals can be enabled or disabled with the ENIT bit in the TCSR. The interrupt status bit (TINT) in the TCSR cannot be disabled and always reflects the current state of the timer interrupt. In Generate Mode, a timer interrupt is caused by the counter rolling over (the same condition used to reload the counter when ARHT is set to '1'). In Capture Mode, the interrupt event is the capture event. Characteristics of the interrupts are:

- Interrupt events can only occur when the timer is enabled. In Capture Mode, this prevents interrupts from occurring before the timer is enabled.
- The interrupt signal goes high when the interrupt condition is met and the interrupt is enabled in the TCSR. The interrupt is asserted when the interrupt signal is high.
- A single interrupt signal is provided. The interrupt signal is the OR of the interrupts from the two counters. The interrupt service routine must poll the TCSR's to determine the source or sources of the interrupt.
- The interrupt status bit (TINT in the TCSR) can only be cleared by writing a '1' to it. Writing a '0' to

it has no effect on the bit. Since the interrupt condition is an edge (the counter rollover or the capture event), it can be cleared at any time and will not indicate an interrupt condition until the next interrupt event.

The top level block diagram of the XPS Timer/Counter is shown in **Figure 1**.

The top level modules of the XPS Timer/Counter are:

- PLB Interface Module
- Timer/Counter

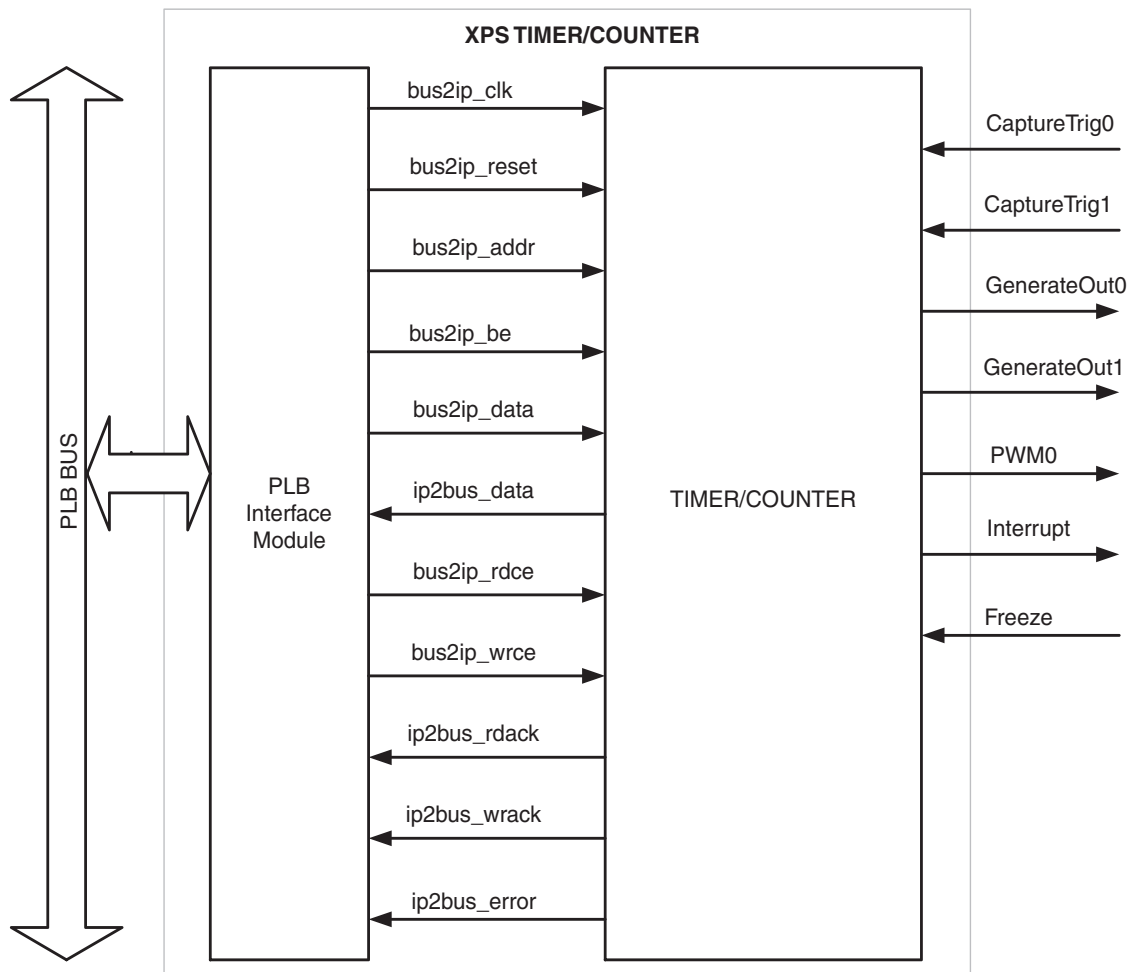


Figure 1: XPS Timer/Counter Top-Level Block Diagram

The detailed block diagram of the XPS Timer/Counter is shown in **Figure 2**.

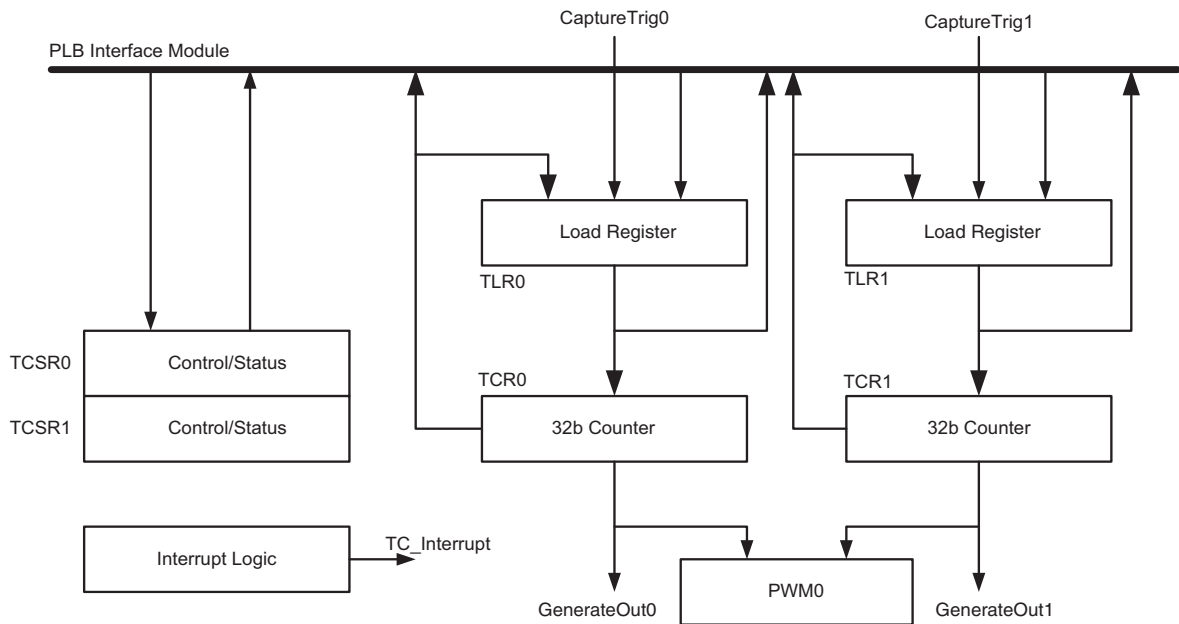


Figure 2: XPS Timer/Counter Detailed Block Diagram

XPS Timer/Counter I/O Signals

The XPS Timer/Counter I/O signals are listed and described in [Table 1](#).

Table 1: XPS Timer/Counter I/O Signal Description

| Port | Signal Name | Interface | I/O | Initial Status | Description |
|-----------------------------------|--|-----------|-----|----------------|-------------------------------|
| System Signals | | | | | |
| P1 | SPLB_Clk | PLB | I | - | PLB clock |
| P2 | SPLB_Rst | PLB | I | - | PLB reset, active high |
| PLB Slave Interface Input Signals | | | | | |
| P3 | PLB_ABus[0 to C_SPLB_AWIDTH - 1] | PLB | I | - | PLB address bus |
| P4 | PLB_PAVValid | PLB | I | - | PLB primary address valid |
| P5 | PLB_masterID[0 : C_SPLB_MID_WIDTH - 1] | PLB | I | - | PLB current master identifier |
| P6 | PLB_RNW | PLB | I | - | PLB read not write |
| P7 | PLB_BE[0 : (C_SPLB_DWIDTH/8) - 1] | PLB | I | - | PLB byte enables |
| P8 | PLB_size[0 : 3] | PLB | I | - | PLB byte enables |
| P9 | PLB_type[0 : 2] | PLB | I | - | PLB transfer type |
| P10 | PLB_wrDBus[0 : C_SPLB_DWIDTH - 1] | PLB | I | - | PLB write data bus |

Table 1: XPS Timer/Counter I/O Signal Description (Contd)

| Port | Signal Name | Interface | I/O | Initial Status | Description |
|--|--------------------------------------|-----------|-----|----------------|--|
| Unused PLB Slave Interface Input Signals | | | | | |
| P11 | PLB_UABus[0 to C_SPLB_AWIDTH - 1] | PLB | I | - | PLB upper address bits |
| P12 | PLB_SAVValid | PLB | I | - | PLB secondary address valid |
| P13 | PLB_rdPrim | PLB | I | - | PLB secondary to primary read request indicator |
| P14 | PLB_wrPrim | PLB | I | - | PLB secondary to primary write request indicator |
| P15 | PLB_abort | PLB | I | - | PLB abort bus request |
| P16 | PLB_busLock | PLB | I | - | PLB bus lock |
| P17 | PLB_MSize | PLB | I | - | PLB data bus port width indicator |
| P18 | PLB_lockErr | PLB | I | - | PLB lock error |
| P19 | PLB_wrBurst | PLB | I | - | PLB burst write transfer |
| P20 | PLB_rdBurst | PLB | I | - | PLB burst read transfer |
| P21 | PLB_wrPendReq | PLB | I | - | PLB pending bus write request |
| P22 | PLB_rdPendReq | PLB | I | - | PLB pending bus read request |
| P23 | PLB_wrPendPri[0 : 1] | PLB | I | - | PLB pending write request priority |
| P24 | PLB_rdPendPri[0 : 1] | PLB | I | - | PLB pending read request priority |
| P25 | PLB_reqPri[0 : 1] | PLB | I | - | PLB current request priority |
| P26 | PLB_TAttribute | PLB | I | - | PLB transfer attribute |
| PLB Slave Interface Output Signals | | | | | |
| P27 | SI_addrAck | PLB | O | 0 | Slave address acknowledge |
| P28 | SI_SSize[0 : 1] | PLB | O | 0 | Slave data bus port size |
| P29 | SI_wait | PLB | O | 0 | Slave wait |
| P30 | SI_rearbitrate | PLB | O | 0 | Slave bus rearbitrate |
| P31 | SI_wrDAck | PLB | O | 0 | Slave write data acknowledge |
| P32 | SI_wrComp | PLB | O | 0 | Slave write transfer complete |
| P33 | SI_rdDBus[0 : C_SPLB_DWIDTH - 1] | PLB | O | 0 | Slave read data bus |
| P34 | SI_rdDAck | PLB | O | 0 | Slave read data acknowledge |
| P35 | SI_rdComp | PLB | O | 0 | Slave read transfer complete |
| P36 | SI_MBusy[0 : C_SPLB_NUM_MASTERS - 1] | PLB | O | 0 | Slave busy |

Table 1: XPS Timer/Counter I/O Signal Description (Contd)

| Port | Signal Name | Interface | I/O | Initial Status | Description |
|---|---------------------------------------|-----------|-----|----------------|--------------------------------------|
| P37 | SI_MWErr[0 : C_SPLB_NUM_MASTERS - 1] | PLB | O | 0 | Slave write error |
| P38 | SI_MRdErr[0 : C_SPLB_NUM_MASTERS - 1] | PLB | O | 0 | Slave read error |
| Unused PLB Slave interface Output Signals | | | | | |
| P39 | SI_wrBTerm | PLB | O | 0 | Slave terminate write burst transfer |
| P40 | SI_rdWdAddr[0 : 3] | PLB | O | 0 | Slave read word address |
| P41 | SI_rdBTerm | PLB | O | 0 | Slave terminate read burst transfer |
| P42 | SI_MIRQ[0 : C_SPLB_NUM_MASTERS - 1] | PLB | O | 0 | Master interrupt request |
| XPS Timer/Counter Signals | | | | | |
| P43 | CaptureTrig0 | Ext. | I | - | Capture Trigger 0 |
| P44 | CaptureTrig1 | Ext. | I | - | Capture Trigger 1 |
| P45 | Freeze | Ext. | I | - | Freeze Count Value |
| P46 | GenerateOut0 | Ext. | O | 0 | Generate Output 0 |
| P47 | GenerateOut1 | Ext. | O | 0 | Generate Output 1 |
| P48 | PWM0 | Ext. | O | 0 | Pulse Width Modulation Output 0 |
| P49 | Interrupt | Ext. | O | 0 | Interrupt |

XPS Timer/Counter Design Parameters

To allow the user to create the XPS Timer/Counter that is uniquely tailored for the user's system, certain features can be parameterized in the XPS Timer/Counter design. This allows the user to have a design that only utilizes the resources required by the system and operating at the best possible performance. The features that are parameterizable in the XPS Timer/Counter are as shown in Table 2.

Table 2: XPS Timer/Counter Design Parameters

| Generic | Feature / Description | Parameter Name | Allowable Values | Default Value | VHDL Type |
|-----------------------------|-----------------------|----------------|--|---------------|-----------|
| System Parameters | | | | | |
| G1 | Target FPGA family | C_FAMILY | virtex4, virtex5, spartan3e, spartan3, spartan3a, spartan3an | virtex5 | string |
| XPS Timer/Counter Parameter | | | | | |

Table 2: XPS Timer/Counter Design Parameters (Contd)

| Generic | Feature / Description | Parameter Name | Allowable Values | Default Value | VHDL Type |
|---------------|--|-----------------------|---|---------------------|------------------|
| G2 | The width in bits of the counters in the XPS Timer/Counter | C_COUNT_WIDTH | 8 - 32 | 32 | integer |
| G3 | Number of Timer modules | C_ONE_TIMER_ONLY | 0 = Two timers are present 1 = One timer is present (No PWM mode) | 0 | integer |
| G4 | Assertion level for CaptureTrig0 | C_TRIG0_ASSERT | '0' = CaptureTrig0 input is low-true '1' = CaptureTrig0 input is high-true | 1 | std_logic |
| G5 | Assertion level for CaptureTrig1 | C_TRIG1_ASSERT | '0' = CaptureTrig1 input is low-true '1' = CaptureTrig1 input is high-true | 1 | std_logic |
| G6 | Assertion level for GenerateOut0 | C_GEN0_ASSERT | '0' = GenerateOut0 output is low-true '1' = GenerateOut0 output is high-true | 1 | std_logic |
| G7 | Assertion level for GenerateOut1 | C_GEN1_ASSERT | '0' = GenerateOut1 output is low-true '1' = GenerateOut1 output is high-true | 1 | std_logic |
| PLB Parameter | | | | | |
| G8 | PLB address width | C_SPLB_AWIDTH | 32 | 32 | integer |
| G9 | PLB data width | C_SPLB_DWIDTH | 32, 64, 128 | 32 | integer |
| G10 | Selects point-to-point or shared PLB topology | C_SPLB_P2P | 0 = Shared Bus Topology 1 = Point-to-Point Bus Topology | 0 | integer |
| G11 | PLB Master ID Bus Width | C_SPLB_MID_WIDTH | $\log_2(\text{C_SPLB_NUM_MASTERS})$ with a minimum value of 1 | 3 | integer |
| G12 | Number of PLB Masters | C_SPLB_NUM_MASTERS | 1 - 16 | 8 | integer |
| G13 | Width of the Slave Data Bus | C_SPLB_NATIVE_DWIDTH | 32 | 32 | integer |
| G14 | PLB burst support | C_SPLB_SUPPORT_BURSTS | 0 | 0 | integer |
| G15 | Base address for XPS Timer/Counter | C_BASEADDR | Valid address | Note ^[1] | std_logic_vector |

Table 2: XPS Timer/Counter Design Parameters (Contd)

| Generic | Feature / Description | Parameter Name | Allowable Values | Default Value | VHDL Type |
|---|------------------------------------|----------------|------------------|---------------------|------------------|
| G16 | High address for XPS Timer/Counter | C_HIGHADDR | Valid address | Note ^[2] | std_logic_vector |
| Notes: <ol style="list-style-type: none"> 1. Indicates the base address of this peripheral expressed as a std_logic_vector. C_BASEADDR must be a multiple of the address-range size and the address-range size, C_HIGHADDR - C_BASEADDR + 1, must be a power of two. 2. C_HIGHADDR must be chosen large enough to accommodate the XPS Timer/Counter registers while also guaranteeing a power-of-two address-range size. | | | | | |

XPS Timer/Counter Parameter Port Dependencies

The dependencies between the XPS Timer/Counter design parameters and the I/O ports are shown in Table 3. The width of the XPS Timer/Counter signals depend on some of the parameters. In addition, when certain features are parameterized away, the related logic is removed.

Table 3: Parameter - Port Dependencies

| Generic or Port | Name | Affects | Depends | Description |
|-------------------|--------------------|--------------------|---------|---|
| Design Parameters | | | | |
| G8 | C_SPLB_AWIDTH | P3, P11 | - | The PLB address width parameter sets the width of the PLB address bus |
| G9 | C_SPLB_DWIDTH | P7, P10, P33 | - | The SPLB data width parameter affects the number of byte enables configured for the SPLB data bus, width of the SPLB data bus and the width of the SPLB slave read data bus |
| G11 | C_SPLB_MID_WIDTH | P5 | G12 | The PLB Master ID Bus Width should be $\log_2(\text{C_SPLB_NUM_MASTERS})$ |
| G12 | C_SPLB_NUM_MASTERS | P36, P37, P38, P42 | - | Number of PLB Masters |
| I/O Signals | | | | |
| P3 | PLB_ABus | - | G8 | The PLB address bus width is determined by the C_SPLB_AWIDTH parameter |
| P5 | PLB_masterID | - | G11 | The PLB master ID is determined by the C_SPLB_MID_WIDTH parameter |
| P7 | PLB_BE | - | G9 | The number of byte enables for the PLB data bus is determined by the C_SPLB_DWIDTH parameter |
| P10 | PLB_wrDBus | - | G9 | The PLB data bus width is determined by the C_SPLB_DWIDTH parameter |
| P11 | PLB_UABus | - | G8 | The width of the PLB upper address bits is determined by the C_SPLB_AWIDTH parameter |
| P33 | SI_rdDBus | - | G9 | The width of the PLB slave read data bus is determined by the C_SPLB_DWIDTH parameter |
| P36 | SI_MBusy | - | G12 | The width of PLB slave busy is determined by the C_SPLB_NUM_MASTERS parameter |
| P37 | SI_MWrErr | - | G12 | The width of PLB slave write error is determined by the C_SPLB_NUM_MASTERS parameter |
| P38 | SI_MRdErr | - | G12 | The width of PLB slave read error is determined by the C_SPLB_NUM_MASTERS parameter |
| P42 | SI_MIRQ | - | G12 | The width of Master interrupt request is determined by the C_SPLB_NUM_MASTERS parameter |

Register Data Types and Organization

Timer Counter registers are accessed as one of the following types:

- Byte (8 bits)
- Half word (2 bytes)
- Word (4 bytes)

The XPS Timer/Counter registers are organized as big-endian data. The bit and byte labeling for the big-endian data types is shown in the [Figure 3](#).

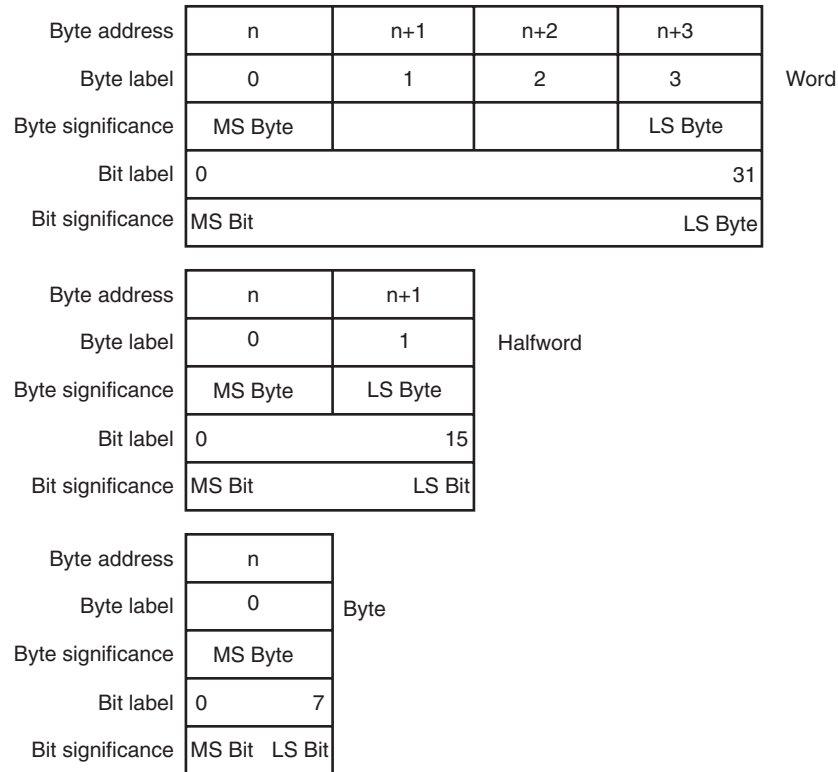


Figure 3: Big-Endian Data Types

Register Descriptions

The addresses of the XPS Timer/ Counter registers are shown in the [Table 4](#):

Table 4: XPS Timer/Counter Register Address Map

| Register | Address (Hex) | Size | Type | Description |
|----------|-------------------|------|------------|---------------------------|
| TCSR0 | C_BASEADDR + 0x00 | Word | Read/Write | Control/Status Register 0 |
| TLR0 | C_BASEADDR + 0x04 | Word | Read/Write | Load Register 0 |
| TCR0 | C_BASEADDR + 0x08 | Word | Read | Timer/Counter Register 0 |
| TCSR1 | C_BASEADDR + 0x10 | Word | Read/Write | Control/Status Register 1 |
| TLR1 | C_BASEADDR + 0x14 | Word | Read/Write | Load Register 1 |
| TCR1 | C_BASEADDR + 0x18 | Word | Read | Timer/Counter Register 1 |

Load Register (TLR0 and TLR1)

When the counter width has been configured as less than 32 bits, the load register value is right-justified in TLR0 and TLR1. The least-significant counter bit is always mapped to load register bit 31. The Figure 4 and Table 5 shows the load register.



Figure 4: Timer/Counter Load Register (TLR)

Table 5: Timer/Counter Load Register

| Bits | Name | Description | Reset Value |
|--------|-----------------------------|-----------------------------|-------------|
| 0 - 31 | Timer/Counter Load Register | Timer/Counter Load register | 0 |

Timer/Counter Register (TCR0 and TCR1)

When the counter width has been configured as less than 32 bits, the count value is right-justified in TCR0 and TCR1. The least-significant counter bit is always mapped to Timer/Counter Register bit 31. The Figure 5 and Table 6 shows the Timer/counter register

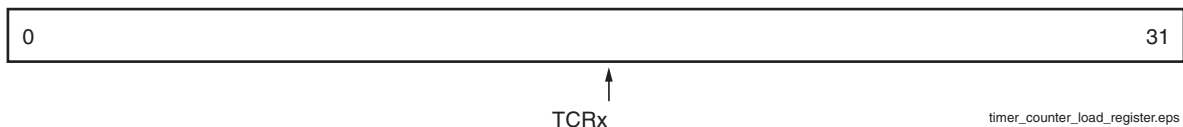


Figure 5: Timer/Counter Register (TCR)

Table 6: Timer/Counter Register

| Bits | Name | Description | Reset Value |
|--------|------------------------|------------------------|-------------|
| 0 - 31 | Timer/Counter Register | Timer/Counter register | 0 |

Control/Status Register 0 (TCSR0)

The Figure 6 and Table 7 shows the Control/Status register 0. Control/Status Register 0 contains the control and status bits for timer module 0.

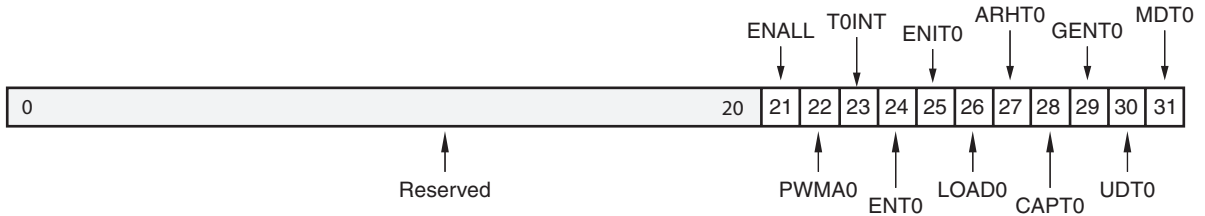


Figure 6: Timer Control/Status Register 0 (TCSR0)

Table 7: Control/Status Register 0 (TCSR0)

| Bits | Name | Description | Reset Value |
|--------|----------|---|-------------|
| 0 - 20 | Reserved | Reserved | - |
| 21 | ENALL | <p>Enable All Timers 0 = No effect on timers 1 = Enable all timers (counters run) This bit is mirrored in all control/status registers and is used to enable all counters simultaneously. Writing a '1' to this bit sets ENALL, ENT0, and ENT1. Writing a '0' to this register clears ENALL but has no effect on ENT0 and ENT1.</p> | 0 |
| 22 | PWMA0 | <p>Enable Pulse Width Modulation for Timer0 0 = Disable pulse width modulation 1 = Enable pulse width modulation PWM requires using Timer0 and Timer1 together as a pair. Timer0 sets the period of the PWM output, and Timer1 sets the high time for the PWM output. For PWM Mode, MDT0 and MDT1 must be '0' and C_GEN0_ASSERT and C_GEN1_ASSERT must be '1'.</p> | 0 |
| 23 | T0INT | <p>Timer0 Interrupt Indicates that the condition for an interrupt on this timer has occurred. If the timer mode is capture and the timer is enabled, this bit indicates a capture has occurred. If the mode is generate, this bit indicates the counter has rolled over. Must be cleared by writing a '1'. <i>Read:</i> 0 = No interrupt has occurred 1 = Interrupt has occurred <i>Write:</i> 0 = No change in state of T0INT 1 = Clear T0INT (clear to '0')</p> | 0 |
| 24 | ENT0 | <p>Enable Timer0 0 = Disable timer (counter halts) 1 = Enable timer (counter runs)</p> | 0 |

Table 7: Control/Status Register 0 (TCSR0) (Contd)

| Bits | Name | Description | Reset Value |
|------|-------|--|-------------|
| 25 | ENIT0 | Enable Interrupt for Timer0 Enables the assertion of the interrupt signal for this timer. Has no effect on the interrupt flag in TCSR0. 0 = Disable interrupt signal 1 = Enable interrupt signal | 0 |
| 26 | LOAD0 | Load Timer0 0 = No load 1 = Loads timer with value in TLRO | 0 |
| 27 | ARHT0 | Auto Reload/Hold Timer0 When the timer is in Generate Mode, this bit determines whether the counter reloads the generate value and continues running or holds at the termination value. In Capture Mode, this bit determines whether a new capture trigger overwrites the previous captured value or if the previous value is held. 0 = Hold counter or capture value 1 = Reload generate value or overwrite capture value | 0 |
| 28 | CAPT0 | Enable External Capture Trigger Timer0 0 = Disables external capture trigger 1 = Enables external capture trigger | 0 |
| 29 | GENT0 | Enable External Generate Signal Timer0 0 = Disables external generate signal 1 = Enables external generate signal | 0 |
| 30 | UDT0 | Up/Down Count Timer0 0 = Timer functions as up counter 1 = Timer functions as down counter | 0 |
| 31 | MDT0 | Timer0 Mode See the Timer Modes section. 0 = Timer mode is generate 1 = Timer mode is capture | 0 |

Control/Status Register 1 (TCSR1)

The **Figure 7** and **Table 8** shows the Control/Status register 1. Control/Status Register 1 contains the control and status bits for timer module 1.

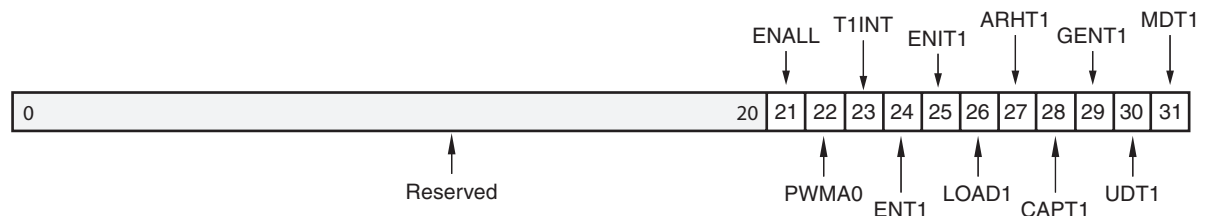


Figure 7: Timer/Status Control Register 1 (TCSR1)

Table 8: Control/Status Register 1 (TCSR1)

| Bits | Name | Description | Reset Value |
|--------|----------|---|-------------|
| 0 - 20 | Reserved | Reserved | - |
| 21 | ENALL | <p>Enable All Timers 0 = No effect on timers 1 = Enable all timers (counters run)</p> <p>This bit is mirrored in all control/status registers and is used to enable all counters simultaneously. Writing a '1' to this bit sets ENALL, ENT0, and ENT1. Writing a '0' to this register clears ENALL but has no effect on ENT0 and ENT1.</p> | 0 |
| 22 | PWMB0 | <p>Enable Pulse Width Modulation for Timer1 0 = Disable pulse width modulation 1 = Enable pulse width modulation</p> <p>PWM requires using Timer0 and Timer1 together as a pair. Timer0 sets the period of the PWM output, and Timer1 sets the high time for the PWM output. For PWM Mode, MDT0 and MDT1 must be '0' and C_GEN0_ASSERT and C_GEN1_ASSERT must be '1'.</p> | 0 |
| 23 | T1INT | <p>Timer1 Interrupt Indicates that the condition for an interrupt on this timer has occurred. If the timer mode is capture and the timer is enabled, this bit indicates a capture has occurred. If the mode is generate, this bit indicates the counter has rolled over. Must be cleared by writing a '1'.</p> <p><i>Read:</i> 0 = No interrupt has occurred 1 = Interrupt has occurred</p> <p><i>Write:</i> 0 = No change in state of T1INT 1 = Clear T1INT (clear to '0')</p> | 0 |
| 24 | ENT1 | <p>Enable Timer1 0 = Disable timer (counter halts) 1 = Enable timer (counter runs)</p> | 0 |
| 25 | ENIT1 | <p>Enable Interrupt for Timer1 Enables the assertion of the interrupt signal for this timer. Has no effect on the interrupt flag in TCSR1.</p> <p>0 = Disable interrupt signal 1 = Enable interrupt signal</p> | 0 |
| 26 | LOAD1 | <p>Load Timer1 0 = No load 1 = Loads timer with value in TLR1</p> | 0 |
| 27 | ARHT1 | <p>Auto Reload/Hold Timer1 When the timer is in generate mode, this bit determines whether the counter reloads the generate value and continues running or holds at the termination value. In capture mode, this bit determines whether a new capture trigger overwrites the previous captured value or if the previous value is held until it is read.</p> <p>0 = Hold counter or capture value 1 = Reload generate value or overwrite capture value</p> | 0 |

Table 8: Control/Status Register 1 (TCSR1) (Contd)

| Bits | Name | Description | Reset Value |
|-------------|-------------|---|--------------------|
| 28 | CAPT1 | Enable External Capture Trigger Timer1 0 = Disables external capture trigger 1 = Enables external capture trigger | 0 |
| 29 | GENT1 | Enable External Generate Signal Timer1 0 = Disables external generate signal 1 = Enables external generate signal | 0 |
| 30 | UDT1 | Up/Down Count Timer1 0 = Timer functions as up counter 1 = Timer functions as down counter | 0 |
| 31 | MDT1 | Timer1 Mode See the Timer Modes section. 0 = Timer mode is generate 1 = Timer mode is capture | 0 |

Implementation

Target Technology

The intended target technology is Virtex-4, Virtex-5 and Spartan-3 family FPGAs.

Device Utilization and Performance Benchmarks

Since the XPS Timer/Counter core will be used with other design modules in the FPGA, the utilization and timing numbers reported in this section are estimates only. System-level results will vary.

The XPS Timer/Counter resource utilization for various parameter combinations measured with Virtex-4 as the target device is detailed in [Table 9](#).

The XPS Timer/Counter resource utilization for various parameter combinations measured with Virtex-5 as the target device is detailed in [Table 10](#).

The XPS Timer/Counter resource utilization for various parameter combinations measured with Spartan-3 as the target device is detailed in [Table 11](#).

Table 9: Performance and Resource Utilization Benchmarks Virtex-4 (xc4vlx25-ff1148-11)

| Parameter Values | | Device Resources | | | Performance |
|------------------|---------------|------------------|------------------|------|------------------------|
| C_ONE_TIMER_ONLY | C_COUNT_WIDTH | Slices | Slice Flip-Flops | LUTs | f _{MAX} (MHz) |
| 0 | 32 | 214 | 182 | 380 | 203 |
| 0 | 16 | 154 | 115 | 264 | 242 |
| 0 | 8 | 124 | 82 | 202 | 249 |
| 1 | 32 | 154 | 112 | 263 | 216 |
| 1 | 16 | 112 | 77 | 182 | 230 |
| 1 | 8 | 92 | 61 | 140 | 245 |

Table 10: Performance and Resource Utilization Benchmarks Virtex-5 (xc5vlx30-ff1153-2)

| Parameter Values | | Device Resources | | Performance |
|------------------|---------------|------------------|------|------------------------|
| C_ONE_TIMER_ONLY | C_COUNT_WIDTH | Slice Flip-Flops | LUTs | f _{MAX} (MHz) |
| 0 | 32 | 182 | 375 | 232 |
| 0 | 16 | 115 | 289 | 263 |
| 0 | 8 | 82 | 241 | 253 |
| 1 | 32 | 112 | 241 | 266 |
| 1 | 16 | 77 | 209 | 276 |
| 1 | 8 | 61 | 189 | 268 |

Table 11: Performance and Resource Utilization Benchmarks Spartan-3 (xc3s1500-fg676-5)

| Parameter Values | | Device Resources | | | Performance |
|------------------|---------------|------------------|------------------|------|------------------------|
| C_ONE_TIMER_ONLY | C_COUNT_WIDTH | Slices | Slice Flip-Flops | LUTs | f _{MAX} (MHz) |
| 0 | 32 | 214 | 181 | 380 | 112 |
| 0 | 16 | 154 | 114 | 264 | 115 |
| 0 | 8 | 127 | 81 | 202 | 135 |
| 1 | 32 | 154 | 111 | 262 | 112 |
| 1 | 16 | 112 | 76 | 181 | 119 |
| 1 | 8 | 91 | 60 | 140 | 128 |

Reference Documents

The following documents contain information that may be required in understanding the XPS Timer/Counter reference design:

- IBM CoreConnect 128-Bit Processor Local Bus: Architecture Specifications version 4.6

Revision History

| Date | Version | Revision |
|----------|---------|-------------------------|
| 11/10/06 | 1.0 | Initial Xilinx release. |
| 4/20/07 | 1.1 | Added SP-3 support. |