



XAPP352 (v1.3) March 30, 2004

Utilizing a User Constraint File for CoolRunner XPLA3 CPLDs

Summary

This application note provides an introduction to the capabilities and functionality of the User Constraint File (UCF) for CoolRunner™ XPLA3 CPLD designs in WebPACK™ Project Navigator.

Introduction

For design entry in ABEL, VHDL, or Verilog, only a few constraint options can be embedded in the source code. In this case, designers have the option to use a UCF. For designs in ABEL, VHDL, Verilog, external netlist (EDIF), schematic, or another design entry, a UCF provides an external means for entering fitter constraint parameters in one design file.

User constraint files allow designers the flexibility to manually control some of the following attributes in a CoolRunner XPLA3 CPLD design:

- Pin and node assignments
- Slew rate control
- Fit options
- Input pin characteristics
- Initial register state
- Global clock use

Many design constraints from the list above are software selectable during implementation. The WebPACK Project Navigator GUI allows some constraints to be generally set for the device. A UCF allows designers to set characteristics for an individual signal in a design. This application note provides an overview of the options available for setting design constraints in WebPACK Project Navigator.

Please note that several syntax and help guides for a UCF exist within the WebPACK Project Navigator help index. These help files are updated with each release of software and provide a reliable source of information.

UCF Specifications

Table 1 illustrates some of the CoolRunner XPLA3 attributes that can be specified in the UCF. More information on these attributes are discussed in the sections below.

Table 1: CoolRunner Attributes

Type of Constraint	Description
Pin Locking	Assign a specific signal to a particular pin or function block/macrocell location
Node Locking	Assign a specific signal to a function block/macrocell location
Pin Prohibiting	Prohibit any signal from being assigned to this pin
Slew Rate	Select the slew rate for a specific output signal
Initial State	Control the state of a specific output register on power up

Table 1: CoolRunner Attributes (Continued)

Type of Constraint	Description
Input Pull-up	Enable the internal pull-up on input pins in the device
Signal Optimization	Enable or disable the reduction of logic for a signal
Global Clock	Assign a specific clock signal to the global clock network

Constraint Priority

Table 2 describes the constraint options that are available in the UCF, WebPACK Project Navigator GUI, or design source code. When multiple design constraints are specified, Table 2 summarizes the priority implementation.

Table 2: Constraint Option Support and Priority

Type of Constraint	UCF	WebPACK Project Navigator GUI	Design Source Code ⁽¹⁾
Pin Locking	Supported	N/A	Supported (Highest Priority)
Node Locking	Supported	N/A	N/A
Pin Prohibiting	Supported	N/A	N/A
Slew Rate	Supported	Supported (Global Setting) (Lowest Priority)	Supported (Highest Priority)
Initial State	Supported	Supported (Global Setting) (Lowest Priority)	Supported (Highest Priority)
Input Pull-up	Supported	N/A	N/A
Signal Optimization	Supported	N/A	Supported (Highest Priority)
Global Clock	Supported	N/A	Supported

Notes:

- For more information on setting design constraints in the VHDL, Verilog, or ABEL design source code, please refer to the WebPACK Project Navigator **Help**.

Specify UCF

The UCF can be edited directly from within WebPACK Project Navigator as shown in Figure 1 by selecting **Edit Constraints (Text)** under the **User Constraints** processes.

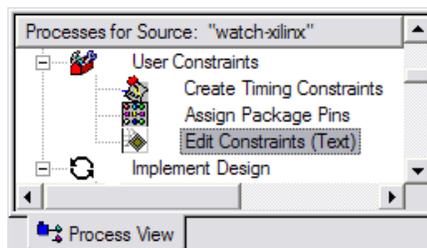


Figure 1: Link to Edit UCF

The UCF that is opened when this option is invoked is displayed in the editor window of project navigator. If your project did not have a UCF file, the project navigator will create a blank one in the editor window and place it in your project. The following dialog will display:

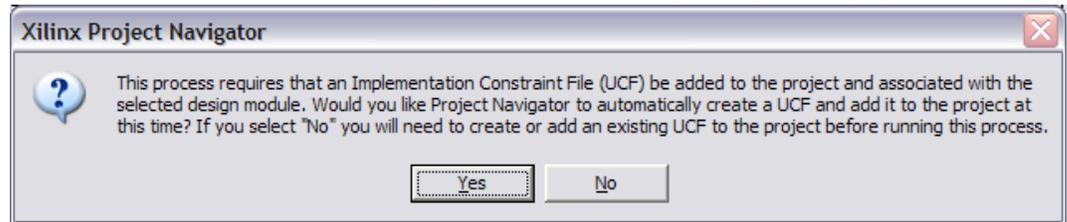


Figure 2: Create New UCF

Select **Yes** to create a new UCF. You may also create a new UCF by selecting **Project -> New Source** from the project navigator menu. If you already have a UCF file, and want to add it to your project, select **Project -> Add Source**.

Pin Locking


Pin locking is performed in a number of ways during design implementation. Pins can be assigned in one of three methods:

- Specified in the source code for ABEL, Verilog, or VHDL designs
- Automatic assignment in WebPACK Project Navigator
- Individual pin specification in the UCF

Pin locking is directly affected by the options available for XPLA3™ I/O and macrocell configurations. Please refer to the [CoolRunner XPLA3 Data Sheet](#) for more information on the XPLA3 architecture. In XPLA3 devices, each function block has 16 macrocells. The number of macrocells available as I/O is package dependent. The number of available function blocks will depend on the size of CoolRunner device being used. The available configurations for each macrocell in the device can be specified in the UCF, the design source code, or done automatically in WebPACK Project Navigator, in one of five ways:

- Fast input register
- Combinational output signal
- Buried combinational signal
- Buried registered signal
- Registered output signal
- Fast input register and buried combinational signal

Figure 3 illustrates a macrocell register that can function as a fast input register, with the preceding combinational logic preserved and feedback to the interconnect array as a buried combinational node.

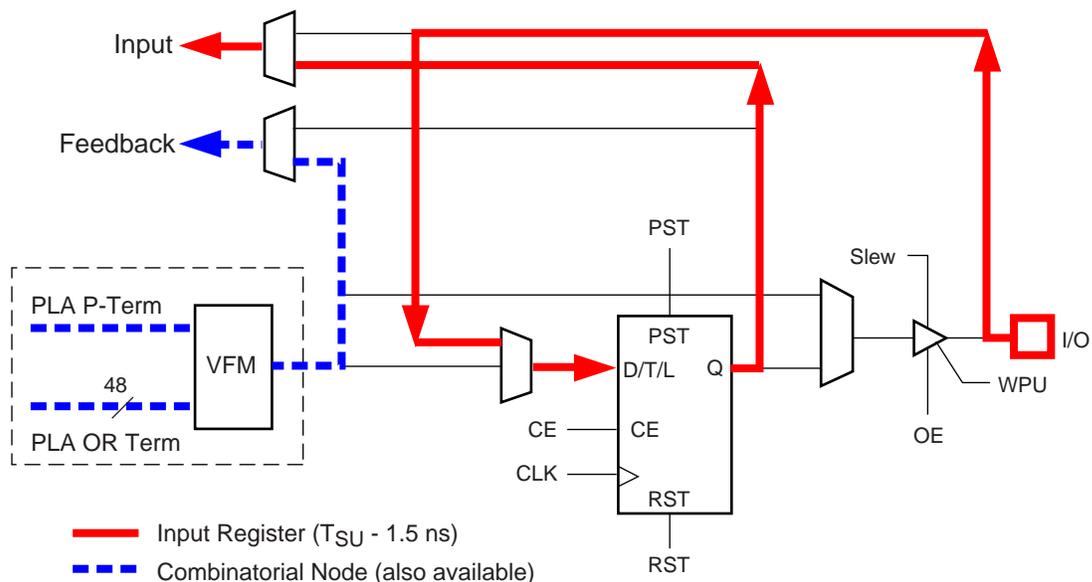

XAPP352_03_110900

Figure 3: XPLA3 Macrocell Input Register and Node Configuration

Automatic Pin Locking

WebPACK Project Navigator provides the option for automatic pin locking after a design has been compiled and synthesized. Figure 4 shows how to invoke this option if so desired.

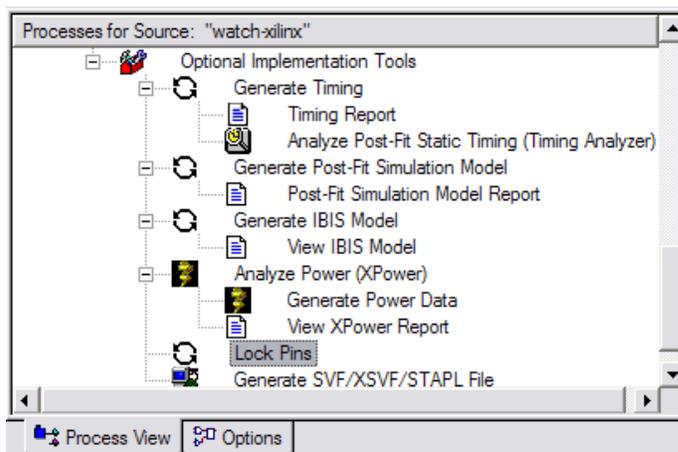


Figure 4: Locking Pins Automatically

When starting a design, it is recommended to run the automatic lock pins function after all design and fitter changes have been made. The automatic lock pins option creates a UCF for the selected design file. This file needs to be specified in WebPACK Project Navigator as shown in Figure 2. Refer to section "Pin and Node Locking Options" on page 6 for keeping pin assignments.

If a different pinout is desired, it is then easier to go back and manually edit the UCF. If pin locations have been changed, go back and recompile the design.

UCF Pin Locking

Input and output signals can be assigned to a specific pin in either the UCF or design source code. [Table 3](#) illustrates the syntax and an example for locking a signal to a specific location in an XPLA3 UCF. To assign a signal to a particular pin, the pin number must be specified. The pin numbers that are available are package dependent and more information is available from the XPLA3 product data sheet.

Table 3: Pin Locking

Syntax	Examples
NET <signal_name> LOC=Pnn; Note: nn is the pin number as described in the data sheet for PC, PQ, TQ and similar packages	NET clk LOC = P10; NET qout<0> LOC = P20;
NET <signal_name> LOC=RC; Note: RC is the row and column pin number specification as described in the data sheet for CS, BG, and similar packages	NET clk LOC = C8; NET qout<1> LOC = G2;

In the WebPACK Project Navigator UCF, signals can also be assigned to a specific function block. The syntax for this assignment is shown in [Table 4](#).

Table 4: Pin Assignment to a Function Block

Syntax	Examples
NET <signal_name> LOC=FBm; Note: m is the function block number from 1 to x depending on device size	NET clk LOC = FB1; NET clk LOC = FB01; NET qout<0> LOC = FB12;

For more information on the architectural features of the XPLA3 CPLD family that enable flexible pin locking capabilities, please refer to [XAPP332: Pin Locking in CoolRunner XPLA3 CPLDs](#).

Node Locking

When fitting a design, it may also be desirable to assign a signal to a specific macrocell. For designs that need to lock signals to macrocells, the node locking functionality in the UCF is available. To lock a node, the signal must be assigned to a specific function block and macrocell number. Depending on the size of the part being targeted, function block numbers range from 1 to x and macrocells are numbered from 1 to 16. The function block and macrocell numbers and any corresponding pin numbers are available in the [CoolRunner data sheets](#). [Table 5](#) shows the syntax and an example for using node locking in a design.

Table 5: Node Locking

Syntax	Examples
NET <signal_name> LOC=FBm_n; Note: m is the function block number from 1 to x depending on device size and n is the macrocell number ranging from 1 to 16.	NET clk LOC = FB1_4; NET qout<0> LOC = FB12_9; NET qout<1> LOC = FB12_10;

Pin and Node Locking Options

In WebPACK Project Navigator, the fitting process interpolates the UCF. The **Implement Design Process Properties** window allows selecting the option to ALWAYS, TRY, or IGNORE pin and node settings in the UCF or source code as shown in [Figure 5](#). The ALWAYS attribute forces the fitter to keep all pin and node assignments when targeting the design to a particular device. If it is unable to fit the design it will notify the user in an error message. The TRY attribute uses the settings specified in the design and/or UCF when first fitting the design; if the fitter is unable to fit the design it warns the user, then makes modifications as necessary. The IGNORE option discards any settings from the design and/or UCF. Make sure the appropriate setting is selected as shown in [Figure 5](#).

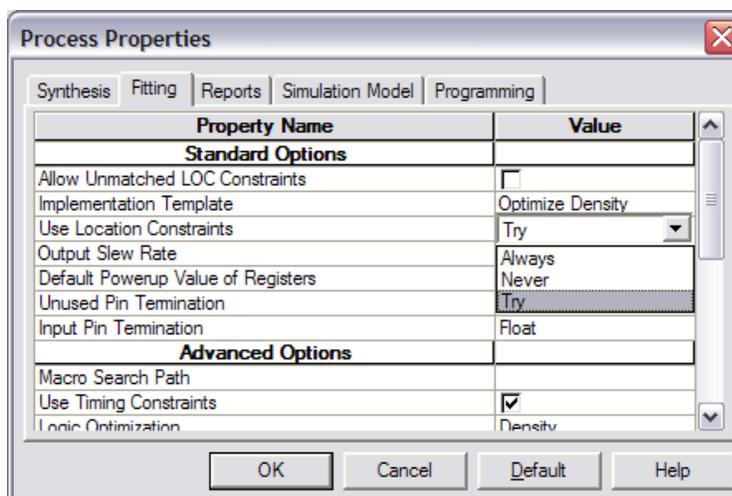


Figure 5: Using Design Location Constraints

Pin Prohibiting

This feature of the UCF allows the designer to prohibit specific pins from being assigned to signals in the design. This attribute differs from package to package as shown in [Table 6](#) below. Note the PROHIBIT attribute can also accept a comma separated list of pins. This command can not prohibit a range of locations. Also note, the PROHIBIT command has higher priority over any signal pin or node assignments in the design.

Table 6: Pin Prohibit Specification

Package	Syntax	Example
PC, PQ, TQ and similar packages	config PROHIBIT = Pnn; (nn in the pin #)	config PROHIBIT = P9, P12, P15;
CS, BG, and similar packages	config PROHIBIT = RC; (Row, Column)	config PROHIBIT = G2;

Slew Rate

The output slew rate for all signals in a design can be specified in the **Implement Design Process Properties** window as shown in [Figure 6](#).

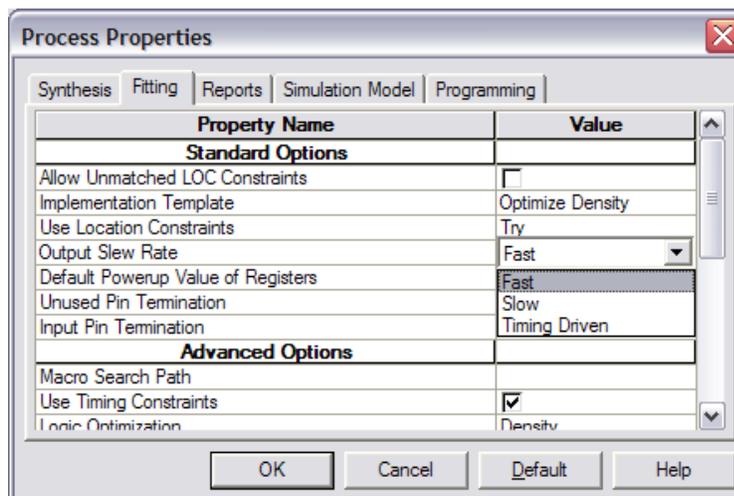


Figure 6: Controlling Output Slew Rate

The UCF allows specification for an individual output slew rate and has priority over default settings in the Implement Design options. The slew rate can be selected as SLOW or FAST as the syntax and an example for the UCF is shown in [Table 7](#). If a SLOW slew rate is specified for a specific signal, an additional delay of 4.0 ns is incurred.

Table 7: Output Slew Rate

Syntax	Examples
NET <signal_name> <slewrates>; Note: <slewrates> can be set to either FAST or SLOW.	NET clk SLOW; NET qout<0> FAST;

Initial State

The initial state of all registers is selectable for XPLA3 and can be specified in the **Implement Design Process Properties** window. XPLA3 can implement all registers in either a reset or preset initial state as shown in [Figure 7](#).

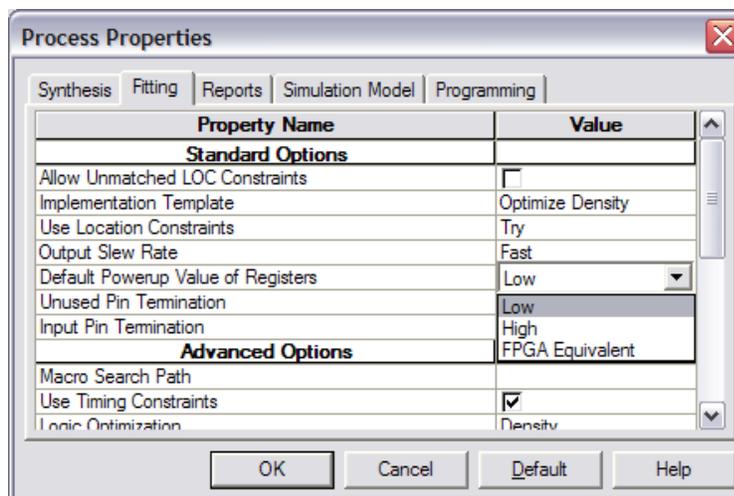


Figure 7: Setting Register Initial State

Selecting the initial state of an individual register is done in the UCF. The UCF allows the power-up initial state to be either SET or RESET as shown in [Table 8](#).

Table 8: Register Initial State

Syntax	Examples
NET <signal_name> INIT = x; Note: x can be set to either R (reset) or S (set).	NET clk INIT = R; NET qout<0> INIT = S;

Input Pull-up

The CoolRunner XPLA3 family has internal pull-up resistors that have been characterized to be approximately 30k to 70k Ohms. Applying an internal pull-up resistor to an input pin can be done through the UCF. The syntax and an example are shown in [Table 9](#).

Table 9: Input Pull-up

Syntax	Examples
NET <signal_name> PULLUP;	NET clk PULLUP; NET qout<0> PULLUP;

Signal Optimization

In the design fitting process, the implementation of signals can be specified in the UCF. The fitter interprets signals and reduces logic to create an optimum fit in the device. The attributes that are available for optimizing signal equations in XPLA3 are described in [Table 10](#).

Table 10: Signal Optimization Options

Command	Functionality
KEEP	Preserves internal nodes during design implementation. The fitter will keep this signal as specified by its equation. This option may increase the number of product terms and/or macrocells needed in the design.
COLLAPSE	Forces an internal node to collapse forward into the logic of another signal. This option may reduce the number of macrocells needed in the design.
NOREDUCE	Preserves redundant logic terms during design implementation. This option may create more internal nodes.

[Table 11](#) shows the syntax and an example for signal optimization options in the UCF.

Table 11: Signal Optimization

Syntax	Examples
NET <signal_name> <attribute>; Note: <attribute> can be either KEEP, COLLAPSE, or NOREDUCE	NET q_int KEEP; NET state_com COLLAPSE; NET q_com NOREDUCE;

Product Terms

The use of product terms can be adjusted for implementation of logic equations. The maximum number of product term for a logic equation can be specified for design implementation. There are a total of 48 available product terms in each XPLA3 function block. Some logic equations in a design may require a large number of product terms and could consume a large percentage

of available product terms in a single function block. If it is desired to fit additional logic within the same function block, requiring unique product terms, the number of product terms available to a specific signal must be reduced.

The WebPACK **Implement Design Process Properties** shown in **Figure 8** illustrates how to specify the number of product terms available to all logic equations in a design.

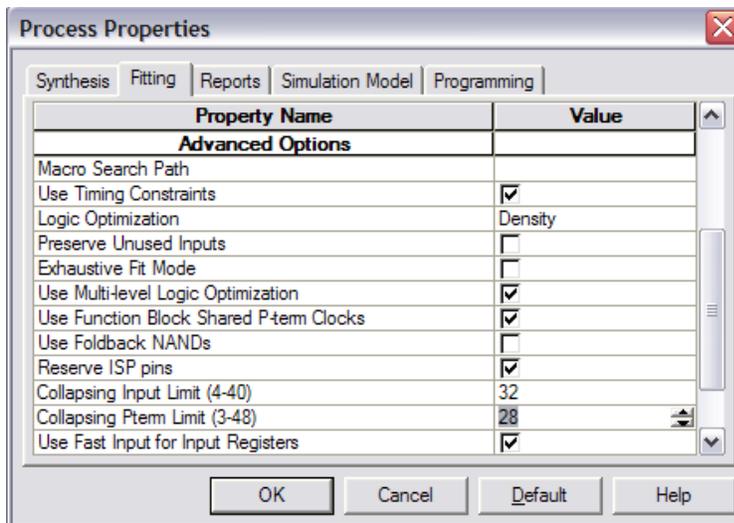


Figure 8: GUI Setting for Maximum Product Terms

When implementing a design, it may be desired to specify the maximum number of product terms available to a specific logic equation. Reducing the number of product terms available to one logic equation increases the amount of logic available to other logic terms in the function block.

Table 12 illustrates the UCF syntax and an example for specifying the number of product terms accessible to a specific logic equation.

Table 12: Max Product Term Specification

Syntax	Examples
NET <signal_name> MAXPT=<integer>; Note: <integer> must be a positive integer less than or equal to 48 (product terms available in XPLA3 function block)	NET qout MAXPT=8; NET cnt_out MAXPT=20;

Global Clock


XPLA3 CPLDs have four global clock inputs. Each function block in the device has two of the four global clocks available at each macrocell. When a design utilizes a clock input in multiple function blocks, the clock is automatically implemented as a global clock and must be assigned to a global clock input pin. When it is desired to specify a clock as a global clock, the UCF syntax shown in **Table 13** illustrates this constraint.

Table 13: Global Clock Syntax

Syntax	Examples
NET <signal_name> BUFG=CLK;	NET sys_clk BUFG=CLK; NET clk1 BUFG=CLK;

Additional Notes

The asterisk (*) can be used as a wildcard character in the NET or PIN signal name in the UCF. The asterisk character will apply the same attribute to more than one element in the design.

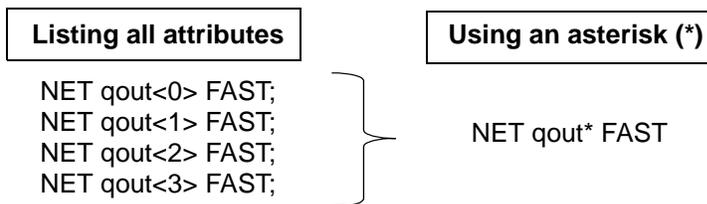

Conclusion

All attributes specified in the WebPACK Project Navigator GUI, the UCF, or the design source code can be verified by reviewing the fitter and timing reports of the design. Utilizing a UCF allows designers to maintain design attributes over design iterations and throughout the design life cycle. A UCF is easy to use and controls signal properties for an entire design. For further assistance with a UCF or WebPACK Project Navigator software, please search for solutions at [Xilinx Online Technical Support](#).

Additional Information

[CoolRunner XPLA3 Data Sheets and Application Notes.](#)
[Device Packages.](#)
[Online Store.](#)

Revision History

The following table shows the revision history for this document.

Date	Version	Revision
11/09/00	1.0	Initial Xilinx release.
06/20/01	1.1	Updated for support of WebPACK release 4.1. This software release will not support the PIN specification. Instead, the NET specification must be implemented.
12/19/01	1.2	Updated for support with WebPACK 4.1i release. New XPLA3 attribute support includes BUFG and MAXPT. Updated to be CoolRunner XPLA3 specific.
03/30/04	1.3	Corrected specification of internal pull-up resistors on page 8. Updated software flow.